



Philips Signage Solutions
Multi-Touch Display

42"

Edge LED Backlight
Full HD
Optical Imaging, 5 Touchpoints

SignageSolutions

BDL4254ET

Discover a new level of interaction

with this multi touch LED display

Get even closer to your audience than ever before. Fast, precise and extremely durable, its high performance is matched by excellent reliability and functionality.

Optimized for public viewing

- Full HD LED technology for brilliant images
- IPS wide view technology for image and color accuracy

Supreme audience interaction

- True multi touch with 5 simultaneous touch points
- USB Plug-and-Play compatible
- Optical touch technology for advanced user interaction
- Compatible with all leading operating systems

Operational flexibility

- Open Pluggable Specification Slot
- Smart insert in the backcover to place a small pc
- Smart Control Software Suite
- Portrait mode operability
- Designed for 24/7 operation

PHILIPS

Highlights

Full HD LED technology

White LED's are solid state devices which light up to full, consistent brightness faster saving startup time. LED's are free from mercury content which allows for eco-friendly recycling and disposal process. LED's allow for better dimming control of LCD backlight, resulting in super high contrast ratio. It also gives superior color reproduction thanks to consistent brightness across the screen.

IPS Display Technology

Philips IPS displays uses an advanced technology which gives you extra wide viewing angles of 178/178 degree, making it possible to view the display from almost any angle - even in portrait mode. IPS displays gives you remarkably crisp images with vivid colors, especially suitable for professional video wall and menuboard applications which demand color accuracy and consistent brightness at all times.

Optical multi-touch

A brand new level of interactivity is now available thanks to the integrated optical touch technology. The sensors on the edge of the screen give you perfect clarity whilst at the same time offering multi-touch interaction, opening

up all kinds of possibilities for new interactive applications.

USB Plug-and-Play compatible

Simply connect the display via USB to your media player for automatic touch recognition. The USB connector is HID compliant, providing true plug-and-play operation.

OPS Slot

Developed for the Digital Signage market, the Open Pluggable Specification (OPS) slot is designed to make changing or upgrading your media player mere child's play. Simply plug your media player in to the display - and you're ready. No matter whether you have an entry level, mid-range or high-end media player, OPS is fully compatible bringing you a lower TCO over the longer term.

Smart Insert

Professional PC's are part of most public signage installations. Quite often they increase the overall depth to the display and cause a lot of cable clutter. So we have designed this display with Smart insert in the back cover which is ideal for the integration of a professional small form factor PC. On top of that, the cable management

system offers a great solution to keep your cables neat and professional looking.

Software compatibility

Our touch displays are software independent and supports Windows 8, Windows 7, Vista, XP, Mac OS and Linux.

Smart Control

Control and manage all of the signage displays on your network with this powerful software tool which allows you to change the settings of your display centrally via an RJ45 or RS232 connection. Smart Control allows you to set the video input, modify the color settings, set the display's ID when creating video walls and even diagnose each display's status, giving you all the power you need to manage your displays from one central location.

Designed for 24/7 operation

Because business never sleeps, our signage displays are designed for 24/7 use. Taking advantage of superior components to ensure a higher level of quality, you can count on this range of models for complete around-the-clock reliability.



Specifications

Picture/Display

- Diagonal screen size: 42 inch / 106.7 cm
- Panel resolution: 1920x1080p
- Optimum resolution: 1920 x 1080 @ 60Hz
- Brightness: 450 cd/m²
- Contrast ratio (typical): 1300:1
- Dynamic contrast ratio: 6500:1
- Response time (typical): 12 ms
- Aspect ratio: 16:9
- Viewing angle (H / V): 178 / 178 degree
- Display colors: 1.06 Billion
- Pixel pitch: 0.485 x 0.485 mm
- Surface treatment: Anti-Glare coating
- Picture enhancement: 3/2 - 2/2 motion pull down, 3D Combfilter, Motion compens. deinterlacing, Progressive scan, 3D MA deinterlacing, Dynamic contrast enhancement

Interactivity

- Multi-touch technology: Optical sensing
- Touch points: 5 simultaneous touchpoints
- Plug and play: HID compliant
- Protection glass: 4 mm tempered safety glass

Connectivity

- Video input: DisplayPort (1.1a), HDMI, DVI-D, VGA (Analog D-Sub), Component (RCA), Composite (RCA)
- Video output: DVI-I, VGA (via DVI-D)
- Audio input: Audio Left/Right (RCA), 3.5 mm jack
- Audio output: Audio Left/Right (RCA), External speaker connector
- External control: RJ45, RS232C (in/out) D-Sub9
- Other connections: USB, AC-out, OPS

Supported Display Resolution

Computer formats

Resolution	Refresh rate
640 x 480	60, 67, 72, 75Hz
800 x 600	56, 60, 72, 75Hz
1024 x 768	60Hz
1280 x 768	60Hz
1280 x 800	60Hz
1280 x 1024	60Hz
1366 x 768	60Hz
1366 x 768	60Hz
1440 x 900	60Hz

Resolution	Refresh rate
1600 x 1200	60Hz
1920 x 1080	60Hz
1920 x 1200	60Hz

• **Video formats**

Resolution	Refresh rate
480i	60Hz
480p	60Hz
576p	50Hz
576i	50Hz
720p	50, 60Hz
1080i	50, 60Hz
1080p	50, 60Hz

Convenience

- Placement: Landscape, Portrait
- Signal Loop Through: DVI, RS232, VGA
- Network controllable: RS232, RJ45
- Picture performance: Advanced color control
- Picture in picture: PIP
- Screen saving functions: Pixel Shift, Low Brightness
- Keyboard control: Hidden, Lockable
- Remote control signal: Lockable
- Ease of installation: AC Out, Smart Insert
- Energy saving functions: Smart Power
- Packaging: Reusable box
- Other convenience: Carrying handles

Dimensions

- Set dimensions (W x H x D): 976.16 x 569.50 x 79.80 mm
- Bezel width: 19.5 mm
- Product weight: 24.3 kg
- VESA Mount: 400 x 400 mm, 400 x 200 mm, 200 x 200 mm
- Smart Insert mount: 100 x 200 mm, 100 x 100 mm

Sound

- Built-in speakers: 2 x 10W

Operating conditions

- Temperature range (operation): 5 ~ 40 °C
- Relative humidity: 20 ~ 80 %
- MTBF: 50,000 hour(s)

Power

- Mains power: 90 ~ 240 VAC, 50/60Hz


- Consumption (On mode): 120 W (Typ.)
- Standby power consumption: <0.5W

Accessories

- Included accessories: AC Power Cord, VGA cable, RS232 cable, USB cable, Remote Control, Batteries for remote controls, Quick start guide, User manual on CD-ROM
- Stand: BM05462 (Optional)

Miscellaneous

- On-Screen Display Languages: English, French, German, Italian, Polish, Turkish, Spanish, Russian, Simplified Chinese, Traditional Chinese
- Regulatory approvals: CE, CCC, FCC, Class B, UL/cUL, RoHS, EPA, CB, C-Tick, EAC, EMF, KUCAS, SASO
- Warranty: 3 year warranty

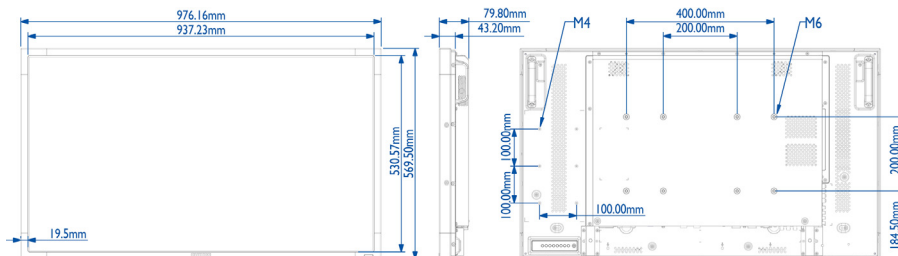

Issue date 2013-10-30

Version: 3.1.1

12 NC: 8670 001 09407
EAN: 87 12581 70323 3

© 2013 Koninklijke Philips N.V.
All Rights reserved.

Specifications are subject to change without notice.
Trademarks are the property of Koninklijke Philips N.V.
or their respective owners.

www.philips.com