




Power cord




DVI Cable




RS232 Cable




HDMI Cable



RS232 Daisy Chain Cable



IR Sensor Cable



IR Cable



x 2



x 1




x 2




x 8

\* Differences according to regions.





Display design and accessories may differ from those illustrated above.







1

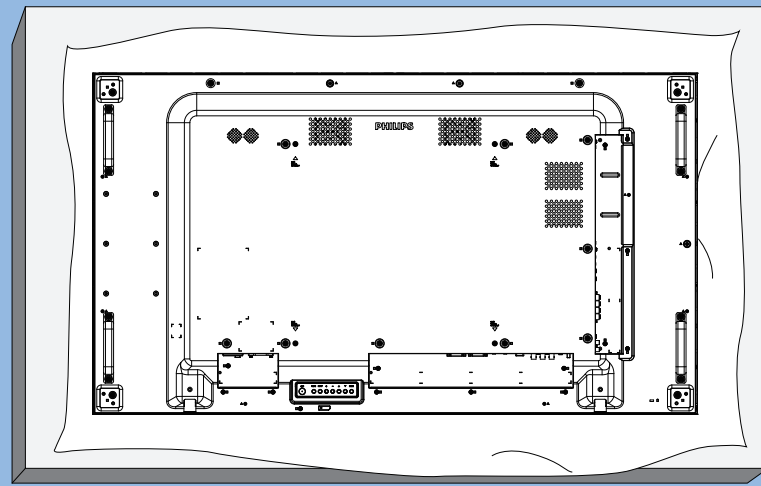

2

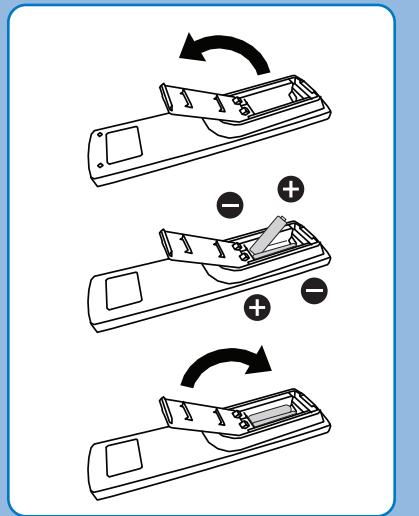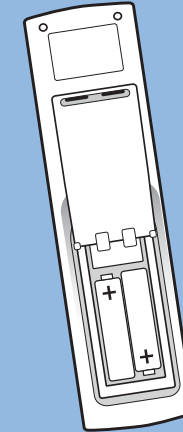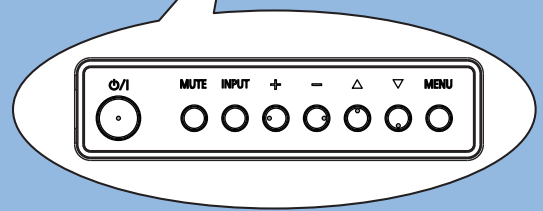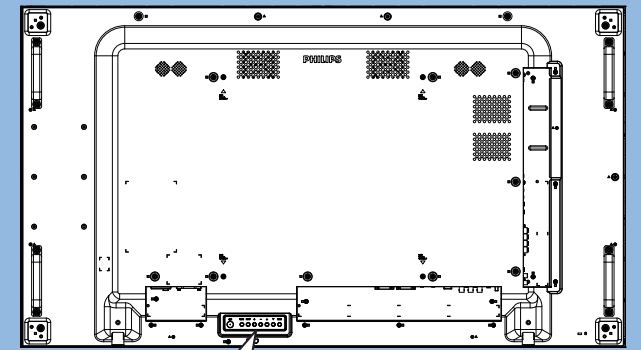

3

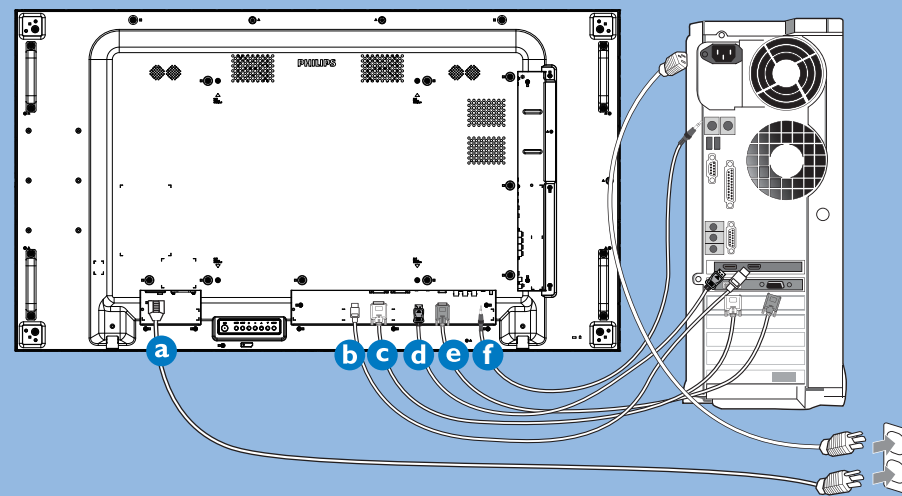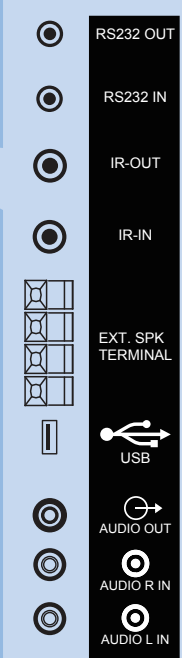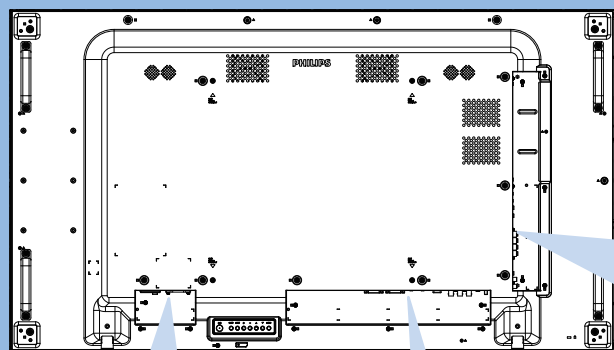

AC IN




HDMI



DVI



DP





VGA




AUDIO


4

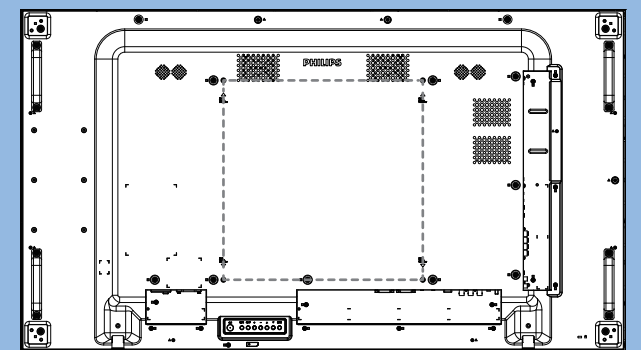

M6 \* (10+X) mm  
(X=Thickness of Wall mount BKT)  
55BDL3105X/55BDL3107X: 400mm x 400mm



5

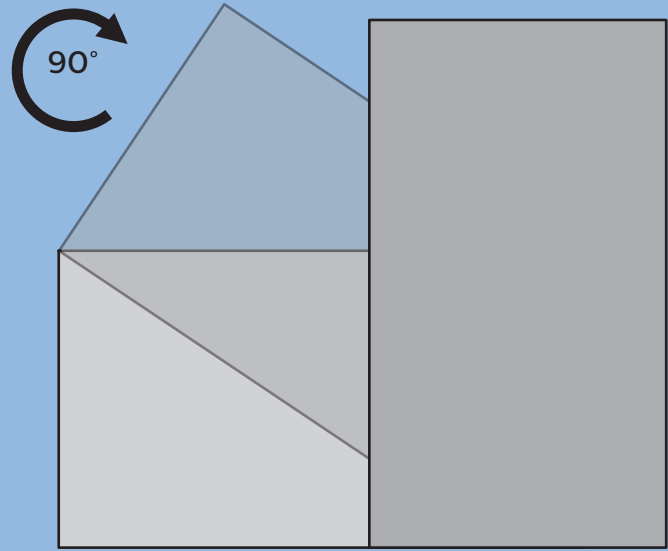

PHILIPS

Professional  
Display Solutions

X line

55BDL3105X  
55BDL3107X



# Quick Start



Please check out the website below for more product information.  
[www.philips.com/signagesolutions-support](http://www.philips.com/signagesolutions-support)



Envision Peripherals Inc.  
490 N McCarthy Blvd, Suite #120  
Milpitas, CA 95035  
USA

© 2020 Koninklijke Philips N.V. All rights reserved.  
Philips and the Philips Shield Emblem are registered  
trademarks of Koninklijke Philips N.V. and are used under  
license from Koninklijke Philips N.V.

Specifications are subject to change without notice.  
Version: V1.00 2020-01-21



Q41G55M181358A