




Philips Signage Solutions Multi-Touch Display

- 65"
- Edge LED Backlight
- Full HD
- Optical Imaging, 5 Touchpoints

SignageSolutions



BDL6524ET

Discover a new level of interaction

with this multi touch LED display

Get even closer to your audience than ever before. Fast, precise and extremely durable, its high performance is matched by excellent reliability and functionality.

Optimized for public viewing

- Full HD LED technology for brilliant images
- AMVA for wide-view super-high contrast, vivid images
- Designed for 24/7 operation
- Portrait mode operability

Supreme audience interaction

- True multi touch with 5 simultaneous touch points
- USB Plug-and-Play compatible
- Compatible with all leading operating systems

Operational flexibility

- Freeze mode for smooth presentations
- Open Pluggable Specification Slot
- Smart Control Software Suite
- Smart insert in the backcover to place a small pc

PHILIPS

Highlights

Full HD LED technology

White LED's are solid state devices which light up to full, consistent brightness faster saving startup time. LED's are free from mercury content which allows for eco-friendly recycling and disposal process. LED's allow for better dimming control of LCD backlight, resulting in super high contrast ratio. It also gives superior color reproduction thanks to consistent brightness across the screen.

AMVA Display Technology

Philips AMVA LED display uses an advanced multi-domain vertical alignment technology which gives you super-high static contrast ratios for extra vivid and bright images. While standard applications are handled with ease, it is especially suitable for graphical demanding applications. It's optimized pixel management technology gives you 178/178 degree extra wide viewing angle, resulting in crisp images even in portrait mode.

OPS Slot

Developed for the Digital Signage market, the Open Pluggable Specification (OPS) slot is designed to make changing or upgrading your media player mere child's play. Simply plug your media player in to the display - and you're ready. No matter whether you have an entry level, mid-range or high-end media player, OPS

is fully compatible bringing you a lower TCO over the longer term.

Smart Insert

Professional PC's are part of most public signage installations. Quite often they increase the overall depth to the display and cause a lot of cable clutter. So we have designed this display with Smart insert in the back cover which is ideal for the integration of a professional small form factor PC. On top of that, the cable management system offers a great solution to keep your cables neat and professional looking.

Smart Control

Control and manage all of the signage displays on your network with this powerful software tool which allows you to change the settings of your display centrally via an RJ45 or RS232 connection. Smart Control allows you to set the video input, modify the color settings, set the display's ID when creating video walls and even diagnose each display's status, giving you all the power you need to manage your displays from one central location.

SmartPower

The backlight intensity can be controlled and pre-set by the system to reduce the power

consumption by up to 50%, which saves substantially on energy costs.

Display Port

Enjoy crystal clear images with the high-bandwidth graphics support of the Display Port. As well as transmitting full high-definition video the Display Port will also transmit audio, thus eliminating the need for extra cables.

Freeze operation

Activate the freeze option during your presentation, to switch the content on your computer without having your audience to see it. Simply deactivate the freeze option when ready to play the live video source again.

USB Plug-and-Play compatible

Simply connect the display via USB to your media player for automatic touch recognition. The USB connector is HID compliant, providing true plug-and-play operation.

Software compatibility

Our touch displays are software independent and supports Windows 8, Windows 7, Vista, XP, Mac OS and Linux.



Specifications

Picture/Display

- Diagonal screen size: 64.5 inch / 163.9 cm
- Panel resolution: 1920x1080p
- Optimum resolution: 1920 x 1080 @ 60 Hz
- Brightness: 360 cd/m²
- Contrast ratio (typical): 4000:1
- Response time (typical): 8 ms
- Aspect ratio: 16:9
- Viewing angle (H / V): 178 / 178 degree
- Display colors: 1.07 Billion
- Pixel pitch: 0.74 x 0.74 mm
- Picture enhancement: 3/2 - 2/2 motion pull down, 3D Combfilter, Motion compens. deinterlacing, Progressive scan, 3D MA deinterlacing, Dynamic contrast enhancement
- Surface treatment: Anti-Glare coating

Interactivity

- Multi-touch technology: Optical sensing
- Touch points: 5 simultaneous touchpoints
- Plug and play: HID compliant
- Protection glass: 5 mm tempered safety glass

Connectivity

- Video input: DisplayPort (1.1a), HDMI, DVI-D, VGA (Analog D-Sub), Component (RCA), Composite (BNC), USB
- Video output: VGA (Analog D-Sub), Composite (BNC)
- Audio input: Audio Left/Right (RCA), 3.5 mm jack
- Audio output: Audio Left/Right (RCA), External speaker connector
- External control: RJ45, RS232C (in/out) D-Sub9
- Other connections: AC-out, OPS

Supported Display Resolution

Computer formats

Resolution	Refresh rate
640 x 480	60, 67, 72, 75Hz
800 x 600	56, 60, 72, 75Hz
1024 x 768	60Hz
1280 x 768	60Hz
1280 x 800	60Hz
1280 x 1024	60Hz
1360 x 768	60Hz
1366 x 768	60Hz
1440 x 900	60Hz
1600 x 1200	60Hz
1920 x 1080	60Hz
1920 x 1200	60Hz

Video formats

Resolution	Refresh rate
480i	60Hz
480p	60Hz
576p	50Hz
576i	50Hz
720p	50, 60Hz
1080i	50, 60Hz
1080p	50, 60Hz
• MAC 640 x 480:	60 Hz
• MAC 832 x 624:	60 Hz
• MAC 1152 x 870:	60 Hz

Convenience

- Placement: Landscape, Portrait
- Signal Loop Through: RS232, VGA
- Network controllable: RS232, RJ45
- Picture performance: Advanced color control
- Picture in picture: PIP
- Screen saving functions: Pixel Shift, Low Brightness
- Keyboard control: Hidden, Lockable
- Remote control signal: Lockable
- Ease of installation: AC Out, Smart Insert
- Energy saving functions: Smart Power
- Packaging: Reusable box
- Other convenience: Carrying handles

Dimensions

- Set dimensions (W x H x D): 1552.3 x 926.8 x 92.2 mm
- Bezel width: 60.7 mm
- Product weight: 53.2 kg
- VESA Mount: 600 x 400 mm
- Smart Insert mount: 100 x 200 mm, 100 x 100 mm

Operating conditions

- Temperature range (operation): 5 ~ 40 °C
- Relative humidity: 20 ~ 80 %
- MTBF: 50,000 hour(s)

Power

- Mains power: 90 ~ 240 VAC, 50/60Hz
- Consumption (On mode): TBC
- Standby power consumption: <0.5W

Sound

- Built-in speakers: 2 x 10W



Accessories

- Included accessories: Remote Control, Batteries

- for remote control, AC Power Cord, VGA cable, User manual on CD-ROM, Quick start guide, RS232 cable
- Stand: (Optional)

Miscellaneous

- On-Screen Display Languages: English, French, German, Italian, Polish, Turkish, Spanish, Russian, Simplified Chinese, Traditional Chinese
- Regulatory approvals: CE, FCC, Class B, UL/cUL, CCC, RoHS
- Warranty: 3 year warranty

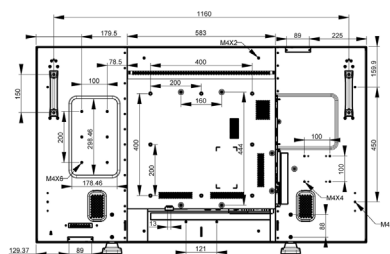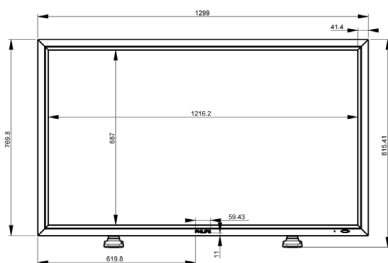

Issue date 2013-08-23
Owner: Tom Rings
Version: 0.0.0

12 NC: 8670 001 09256
EAN: 87 12581 70304 2

Test leaflet, for internal use only!
© 2013 Koninklijke Philips N.V.
All Rights reserved.

Specifications are subject to change without notice.
Trademarks are the property of Koninklijke Philips N.V.
or their respective owners.

www.philips.com