


NEC MultiSync® P495 PG-2
LCD 49" Protective Glass Large Format Display

Datasheet

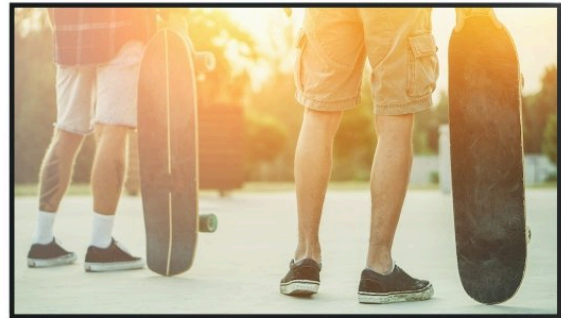

Professional Protection for Professional Signage

The NEC MultiSync® P495 PG-2 models combine professional protection of your investment with unparalleled display performance. Deliver your message with impact and seamless simplicity for the most convincing results.

Guaranteed reliability even under the toughest conditions is achieved with the super robust 4mm thick protective glass designed to withstand external impacts. The anti-reflective glass surface combined with high brightness levels of 700 cd/m² provides crisp and clear images and readability from different viewing angles and distances even in bright ambient light conditions.

The enhanced durability makes the MultiSync® P495 PG-2 series the ideal signage solution for short and medium viewing distances in public spaces with high volumes of people such as for applications in transportation, retail, hospitality and digital out of home as well as for tough environments in industrial applications.

Benefits

Maximum investment security – assured as the display is protected against damage from external impacts such as knocks and blows.

Protects the public – the thermally toughened protective glass will disintegrate into small fragments reducing the risk of injury should it suffer extreme damage.

Mission-critical 24/7 ready operation – the meticulous selection of industrial-grade components and careful design focused on demanding usage scenarios accompany an impressive and continuous viewer experience.

Superb readability – supported through the use of anti-reflective and high light-transmission GroGlass® protective glass.

Product Information

Product Name	NEC MultiSync® P495 PG-2
Product Group	LCD 49" Protective Glass Large Format Display
Order Code	60005858

Display

Panel Technology	IPS with Edge LED backlights
Screen Size [inch/cm]	49 / 124.5
Aspect Ratio	16:9
Brightness [cd/m ²]	700
Contrast Ratio	≥ 8000:1 ¹
Viewing Angle [°]	178 horizontal / 178 vertical (typ. at contrast ratio 10:1)
Colour Depth [bn]	1.073 (10bit)
Colour Gamut	86% of DCI
Response Time (typ.) [ms]	8
Panel Refresh Rate [Hz]	60
Haze Level [%]	Pro (28)
Supported Orientation	Face Down; Face Up ² ; Landscape; Portrait

Glass

Type	GroGlass® Protective Glass
Thickness [mm]	4
Light Transmission [%]	≥ 97
Reflection Rate [%]	1

Synchronisation Rate

Horizontal Frequency [kHz]	15 - 135
Vertical Frequency [Hz]	23 - 76

Resolution

Native Resolution	3840 x 2160			
Supported Resolutions	1024 x 768; 1280 x 1024; 1360 x 768; 1366 x 768;	1400 x 1050; 1440 x 900; 1600 x 1200; 1920 x 1080;	1920 x 2160; 2560 x 1440; 2560 x 1600; 3840 x 2160;	4096 x 2160; 7680 x 4320

Connectivity

Input Video Digital	2 x DisplayPort (with HDCP); 2 x HDMI (with HDCP)
Input Audio Digital	1 x DisplayPort; 2 x HDMI
Input Control	LAN 100Mbit; remote control wire (3,5mm jack); RS232
Input Data	1 x USB 2.0 (Downstream); 1 x USB 2.0 (Powered 5V/2A, Firmware Updates); 1 x USB 2.0 Type-B (Downstream)
Output Video Digital	1 x DisplayPort (loop through: DisplayPort, SDM slot-in PC); 1 x HDMI (loop through: HDMI, SDM slot-in PC)
Output Audio Analogue	1 x 3,5 mm jack
Output Control	1 x LAN 100Mbit
Input Detect	Custom; First; Last
PiP/PbP	Dual-Split; Quad-Split; scalable picture size

Calibration

Factory Calibration	Gamma; Intensity; RGB; Uniformity; White Point
Sensor Calibration (through USB)	PC-less Calibration with USB Sensor MDSV Sensor3; White Copy (post self-calibration)
Calibration with Software	Corner Uniformity; Gamma; Intensity; RGB; Update Factory Calibration; White Point
Calibration Software	NEC Display Wall Calibrator

Open Modular Intelligence

Intel® SDM	accepts Intel® Smart Display Modules Large and Small up to 66 W
Compute Module Slot	RPi Compute Module 4

Sensors

Ambient Light Sensor	Integrated, triggered actions programmable
Temperature Sensor	Integrated, 3 sensors, triggered actions programmable

Electrical

Power Consumption Eco/max. [W]	105 shipping
Power Savings Mode [W]	< 0.5; < 2 (Networked Standby)
Power Management	VESA DPMS
Power Supply	100-240 V AC; 50/60 Hz; internal

Environmental Conditions

Operating Temperature [°C]	+0 to +40
Operating Humidity [%]	20 to 80
Storage Humidity [%]	10 to 90
Storage Temperature [°C]	-20 to 60

Mechanical

Dimensions (W x H x D) [mm]	1,122.6 x 644.2 x 69.8
Weight [kg]	31.8
Bezel Width [mm]	16 (top); 19.6 (bottom); 22.1 (left and right)
VESA Mounting [mm]	300 x 300 (FDMI); 4 holes; M6
Ingress Protection	IP5x (front); IP2x (back)
Packaging Dimensions (W x H x D) [mm]	1,298 x 860 x 224
Packaging Weight [kg]	38.7
Colour Bezel	Pantone 426M (black)
Material	Metal

Available Options

Accessories	Feet (ST-43M); Presence Sensor (KT-RC3); Soundbar (passive: SP-PSCM-IQ); Speaker (SP-RM3); Trolley (PD04-Tipster Trolley); Wall mount (PDW S 32-65 L, PDW S 32-65 P)
-------------	--

Green Features

Energy Efficiency	Energy consumption: 106 kWh/1000 h; Energy efficiency class: G; LED backlight
Ecological Standards	EnergyStar 8.0

Additional Features

Special Characteristics	DICOM Simulation; HDMI ARC; Powered USB Port (10 W); Removable Logo
-------------------------	---

Safety and Ergonomics	BSMI; CE; EAC; EMC Class B; Energy Star 8; FCC Class B; KC/KCC; PSB; RCM; RoHS; VCCI
Pixel Failure Class	ISO 9241-307, Class 1
Shipping Content	2x AAA batteries; Display; HDMI Cable; Power Cable; Remote Control; Setup Manual
Warranty	3 years warranty incl. backlight; additional services available; optional 4. + 5. year warranty extension ³
Operating Hours	24/7
External Control	AMX NetLinx Support; ASCII Control Commands; Crestron Connected; HDMI CEC; HTTP Browser; PJLink; Scheduled Timer; SNMP
Remote Management	Automated Email Alerts; NEC NaViSet Administrator 2
Security	Disable HW Buttons; Disable IR Functionality; Emergency Notification
Resistance to Fire	Metal backcover, plastic material certified acc. to UL94-5VB

¹ out of the box conditions, local dimming ON

² adjusted usage conditions for face up/down installations, please refer to operational guidelines or contact our support

³ please refer to terms and conditions of warranty extensions



FCC Class B



RoHS



CE



VCCI



RCM

This document is © 2023 Sharp NEC Display Solutions Europe GmbH.

All rights reserved in favour of their respective owners. All hardware and software names are brand names and/or registered trademarks of the respective manufacturers. All specifications are subject to change without notice. Errors and omissions are excepted. 23.02.2023